


ACL Type (Simplex, Thread Connection)

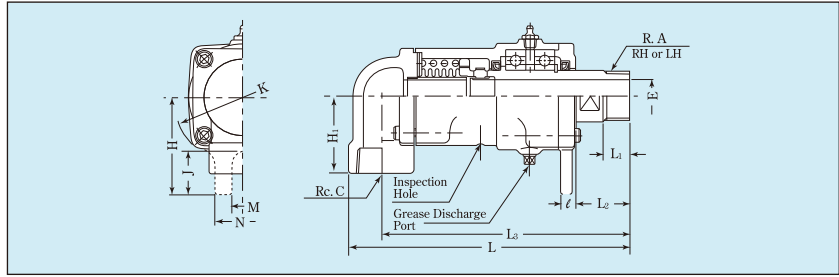


NOMINAL SIZE		A	C	E	H ₁	H	J	K	M	N	L ₁	L ₂	φ	L ₃	L
10A	3/8B	3/8	3/8	8	43	55	24	78	15	35	18	38	9	164	179
15A	1/2B	1/2	1/2	12	43	55	24	78	15	35	18	38	9	164	179
20A	3/4B	3/4	3/4	18	45	65	28	90	20	45	20	38	12	180	198
25A	1B	1	1	24	60	75	32	110	20	50	25	48	12	204	227
32A	1 1/4B	1 1/4	1 1/4	30	75	95	40	130	20	50	25	52	14	239	270
40A	1 1/2B	1 1/2	1 1/2	34	75	95	40	130	20	50	25	52	14	239	270
50A	2B	2	2	46	85	100	40	138	20	55	30	63	16	268	307
65A	2 1/2B	2 1/2	2 1/2	60	97	120	46	180	25	60	30	78	19	319	367
80A	3B	3	3	72	100	130	52	193	30	70	34	85	20	346	401

TYPE & SIZE: Example for placing order


Type → Size → Thread direction of Rotor: RH or LH

Example: ACL 25A RH



* Rc1/2x3/8 bushing has been set to Rc.C connecting port of nominal size 10A joint and dimension H₁ of it is different from the table.

ACLF Type (Simplex, Flange Connection)

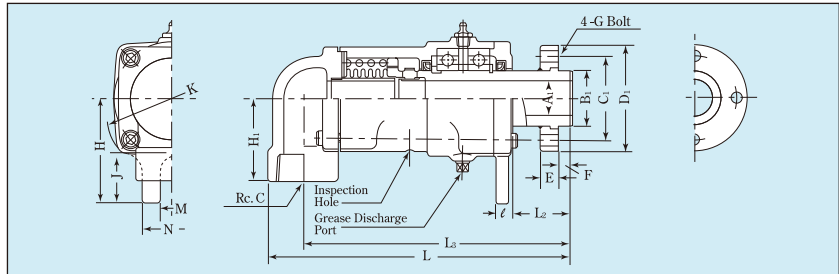


NOMINAL SIZE	C	A ₁	FLANGE DIMENSIONS							H ₁	H	J	K	M	N	L ₂	φ	L ₃	L
			B ₁	C ₁	D ₁	E	F	G											
10A	3/8B	3/8	12	25	45	62	11	8	M8	43	55	24	78	15	35	38	9	164	179
15A	1/2B	1/2	12	25	45	62	11	8	M8	43	55	24	78	15	35	38	9	164	179
20A	3/4B	3/4	18	30	54	74	13	8	M10	45	65	28	90	20	45	42	12	184	202
25A	1B	1	24	35	60	80	14	9	M10	60	75	32	110	20	50	46	12	202	225
32A	1 1/4B	1 1/4	34	50	75	96	16	9	M10	75	95	40	130	20	50	49	14	236	267
40A	1 1/2B	1 1/2	34	50	75	96	16	9	M10	75	95	40	130	20	50	49	14	236	267
50A	2B	2	46	65	95	120	19	10	M12	85	100	40	138	20	55	60	16	265	304
65A	2 1/2B	2 1/2	60	80	110	136	20	12	M12	97	120	46	180	25	60	62	19	303	351
80A	3B	3	72	90	125	154	20	15	6-M12	100	130	52	193	30	70	85	20	346	401

TYPE & SIZE: Example for placing order

Type → Size

Example:
ACLF 25A

* The flange connection type is supplied with a copper gasket (to be attached on the shaft end), along with a stud bolt, nut and washer set.



* When you place an order for the flange connection type, it is not necessary to specify the direction of the thread.

* Since Type 80A has a split ring on the flange, be sure to use a gasket at the end of the shaft.

* Rc1/2x3/8 bushing has been set to Rc.C connecting port of nominal size 10A joint and dimension H₁ of it is different from the table.