


品番 (例) FFS-50-80-65.5-6-4-0.1-N

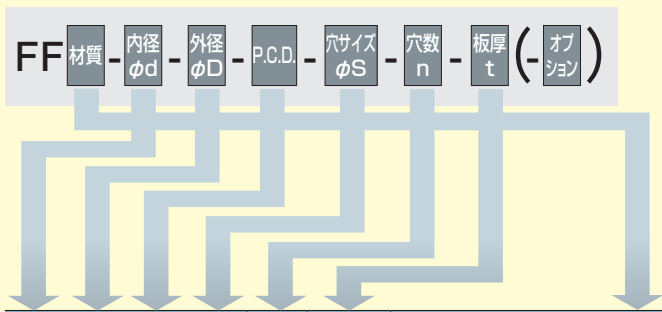

指定0.1mm単位				穴数 n	板厚 t	価格(円)／枚									
内径 φd	外径 φD	P.C.D.	穴サイズ φS			鉄 FF [F]		焼入鋼 FF [Y]		ステンレス FF [S]		真鍮 FF [B]		アルミ FF [A]	
						1~20枚	21~100枚	1~20枚	21~100枚	1~20枚	21~100枚	1~20枚	21~100枚	1~20枚	21~100枚
10 }	22 }50	16 }	2 }	1 }8	0.05	—	—	—	—	1,000	700	950	670	—	—
					0.1~0.5	800	560	1,100	770	880	620	850	600	850	600
					0.6~1.0	850	600	1,200	840	900	630	880	620	880	620
					1.2~2.3	950	670	1,400	980	1,150	810	1,550	1,090	1,000	700
					2.5~3.2	1,000	700	—	—	1,250	880	—	—	1,200	840
					4.0~4.5	1,200	840	—	—	1,450	1020	—	—	—	—
	5.0~6.0				1,400	980	—	—	1,700	1190	—	—	—	—	
	0.05				—	—	—	—	1,100	770	1,000	700	—	—	
	0.1~0.5				850	600	1,400	980	900	630	880	620	880	620	
	0.6~1.0				900	630	1,500	1,050	950	670	920	650	920	650	
	1.2~2.3				1,100	770	1,800	1,260	1,400	980	2,200	1,540	1,200	840	
	2.5~3.2				1,300	910	—	—	1,700	1,190	—	—	1,500	1,050	
	4.0~4.5				1,600	1,120	—	—	2,000	1,400	—	—	—	—	
	5.0~6.0				1,900	1,330	—	—	2,500	1,750	—	—	—	—	
	0.05				—	—	—	—	1,300	1,040	1,200	960	—	—	
	0.1~0.5				900	720	—	—	1,000	800	950	760	950	760	
	0.6~1.0				1,000	800	—	—	1,100	880	1,200	960	1,050	840	
	1.2~2.3				1,300	1,040	—	—	1,600	1,280	2,500	2,000	1,400	1,120	
2.5~3.2	1,600	1,280	—	—	2,000	1,600	—	—	1,800	1,440					
4.0~4.5	1,900	1,520	—	—	2,600	2,080	—	—	—	—					
5.0~6.0	2,400	1,920	—	—	3,400	2,720	—	—	—	—					
0.05	—	—	—	—	1,500	1,200	1,400	1,120	—	—					
0.1~0.5	950	760	—	—	1,100	880	1,000	800	1,000	800					
0.6~1.0	1,150	920	—	—	1,400	1,120	1,600	1,200	1,200	960					
1.2~2.3	1,600	1,280	—	—	2,000	1,600	3,200	2,560	1,700	1,360					
2.5~3.2	2,000	1,600	—	—	2,800	2,240	—	—	2,200	1,760					
4.0~4.5	2,700	2,160	—	—	3,600	2,880	—	—	—	—					
5.0~6.0	3,300	2,640	—	—	5,000	4,000	—	—	—	—					
0.05	—	—	—	—	1,900	1,520	1,500	1,200	—	—					
0.1~0.5	1,150	920	—	—	1,300	1,040	2,200	1,760	1,200	960					
0.6~1.0	1,550	1,240	—	—	1,900	1,520	4,000	3,200	1,600	1,280					
1.2~2.3	2,100	1,680	—	—	2,500	2,000	—	—	2,300	1,840					
2.5~3.2	2,600	2,080	—	—	3,800	3,040	—	—	3,000	2,400					
4.0~4.5	3,500	2,800	—	—	4,800	3,840	—	—	—	—					
5.0~6.0	4,200	3,360	—	—	7,200	5,760	—	—	—	—					