


# Standard item

## High versatility with pipe extension in vertical and horizontal For remote attachment by shaft (maximum bend angle: 45°)


- Please select color either W(white) or B(black)
- Screw with handle is also available. Please refer to page 111.

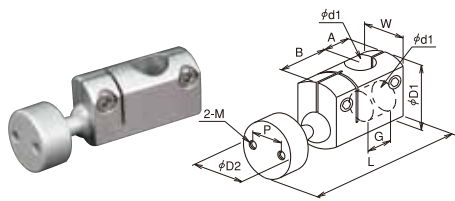

### ■screw attachment

※withstand load = 50mm from the center of sphere


Part No.	color	φd1	φD1	A	B	W	G	L	φD2	P	2-M×valid	Cap screw	Horizontal load N
BC360S-	W (White) B (Black)	φ 6	φ15	10	15	10	10	39	φ13	9	M3× 5	M3	23
BC360E-		φ 8	φ20	13	19.5	14	13	49	φ15				26
BC360C-		φ 9		19	48.5			33					
BC360F-		φ10	15	19.5	18	15	49.5	φ22	12	M4× 8	M4	37	
BC360G-		φ12		63.5			78						
BC360J-		φ13	φ25	25.5	18	15	64.5	φ22	12	M4× 8	M4	98	
BC360K-		φ15					79.5					138	
BC360N-		φ16	φ29	18	33	22	18	81.5	φ25	15	M5×10	M5	154
BC360L-		φ19.1	φ37	22	39	26	22	94	φ29	16	M6×12	M5	167
BC360Q-		φ20						95.5					177

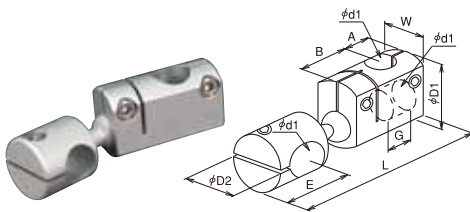

### ■horizontal attachment

※withstand load = 50mm from the center of sphere

Part No.	color	φd1	φD1	A	B	W	G	L	φD2	E	Cap screw	Horizontal load N		
BC363S-	W (White) B (Black)	φ 6	φ15	10	15	10	10	45	φ13	9	M3	23		
BC363E-		φ 8	φ20	13	19.5	14	13	58	φ15			12	M4	26
BC363C-		φ 9		19	58.5			33						
BC363F-		φ10	15	19.5	18	15	61.5	φ22	14	13.5	M4	37		
BC363G-		φ12		73.5			78							
BC363J-		φ13	φ25	25.5	18	15	75.5	φ22	14.5	14	M4	98		
BC363K-		φ15					91.5					138		
BC363N-		φ16	φ29	18	33	22	18	94.5	φ25	17	M5	M5	154	
BC363L-		φ19.1	φ37	22	39	26	22	111	φ29	20	M5	M5	167	
BC363Q-		φ20						114.5					177	

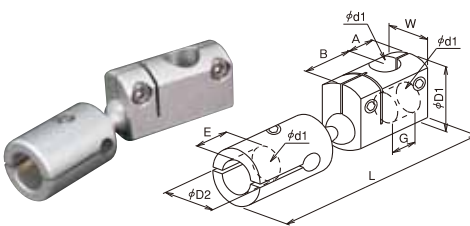

### ■vertical attachment

※withstand load = 50mm from the center of sphere

Part No.	color	φd1	φD1	A	B	W	G	L	φD2	E	Cap screw	Horizontal load N		
BC364S-	W (White) B (Black)	φ 6	φ15	10	15	10	10	54	φ13	7	M3	23		
BC364E-		φ 8	φ20	13	19.5	14	13	66	φ15			9	M4	26
BC364C-		φ 9		19	66.5			33						
BC364F-		φ10	15	19.5	18	15	70.5	φ22	11	10	M4	37		
BC364G-		φ12		83.5			78							
BC364J-		φ13	φ25	25.5	18	15	84.5	φ25	14	13	M4	98		
BC364K-		φ15					100.5					138		
BC364N-		φ16	φ29	18	33	22	18	102.5	φ25	14	M5	M5	154	
BC364L-		φ19.1	φ37	22	39	26	22	119	φ29	18	M5	M5	167	
BC364Q-		φ20						120.5					177	

## Usage Examples

### 3D-Bracket



Installation of image lighting equipment with graduated KAKU-pipe



For variable fixing of an ionizer or a tube



Installation of the spot light



For fixing of the welfare instrument