


●優れた切削バランスにより一般鋼からステンレス鋼まで安定した穴あけ加工が可能です。

Superior balance provides consistent drilling of materials ranging from Low Carbon Steel to Stainless Steel.

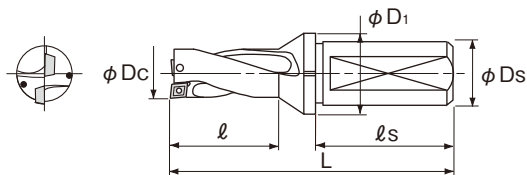

●ホルダ Holder

LIST 9514

オーダ方法 商品記号

単位 (Unit) : mm / 円 (¥)

| 商品記号 Code | 直径 Dc | 寸法 | | | | | 半径方向 オフセット量 (最大) | 在庫 Stock | 参考価格 Price | 形状 |
|--------------|----------|-----|-----|------|--------|----|------------------------|-------------|---------------|----|
| | | L | ℓ | D1 | Ds | ℓs | | | | |
| NWDX130D2S20 | 13.0 | 88 | 29 | 28 | 20 | 44 | 0.35 | ● | 39,100 | |
| NWDX135D2S20 | 13.5 | 89 | 30 | | | | 0.30 | | 39,100 | |
| NWDX140D2S20 | 14.0 | 90 | 31 | | | | 0.25 | | 39,100 | |
| NWDX145D2S20 | 14.5 | 91 | 32 | | | | 0.20 | | 39,100 | |
| NWDX150D2S20 | 15.0 | 92 | 33 | | | | 0.15 | | 39,100 | |
| NWDX155D2S20 | 15.5 | 93 | 34 | | | | 0.40 | | 40,000 | |
| NWDX160D2S20 | 16.0 | 94 | 35 | | | | 0.35 | | 40,000 | |
| NWDX165D2S20 | 16.5 | 95 | 36 | | | | 0.30 | | 40,000 | |
| NWDX170D2S20 | 17.0 | 96 | 37 | | | | 0.25 | | 41,900 | |
| NWDX175D2S25 | 17.5 | 109 | 38 | | | | 0.20 | | 41,900 | |
| NWDX180D2S25 | 18.0 | 110 | 39 | 0.50 | 42,900 | | | | | |
| NWDX185D2S25 | 18.5 | 111 | 40 | 0.45 | 42,900 | | | | | |
| NWDX190D2S25 | 19.0 | 112 | 41 | 0.40 | 42,900 | | | | | |
| NWDX195D2S25 | 19.5 | 113 | 42 | 0.30 | 42,900 | | | | | |
| NWDX200D2S25 | 20.0 | 114 | 43 | 0.20 | 42,900 | | | | | |
| NWDX205D2S25 | 20.5 | 115 | 44 | 0.15 | 42,900 | | | | | |
| NWDX210D2S25 | 21.0 | 116 | 45 | 0.70 | 43,800 | | | | | |
| NWDX215D2S25 | 21.5 | 117 | 46 | 0.60 | 43,800 | | | | | |
| NWDX220D2S25 | 22.0 | 118 | 47 | 0.50 | 43,800 | | | | | |
| NWDX225D2S25 | 22.5 | 119 | 48 | 0.45 | 45,700 | | | | | |
| NWDX230D2S25 | 23.0 | 123 | 49 | 0.40 | 45,700 | | | | | |
| NWDX235D2S25 | 23.5 | 124 | 50 | 0.35 | 45,700 | | | | | |
| NWDX240D2S25 | 24.0 | 125 | 51 | 0.25 | 45,700 | | | | | |
| NWDX245D2S25 | 24.5 | 126 | 52 | 0.20 | 45,700 | | | | | |
| NWDX250D2S25 | 25.0 | 127 | 53 | 0.15 | 45,700 | | | | | |
| NWDX255D2S32 | 25.5 | 134 | 54 | 1.00 | 57,100 | | | | | |
| NWDX260D2S32 | 26.0 | 135 | 55 | 0.90 | 57,100 | | | | | |
| NWDX265D2S32 | 26.5 | 136 | 56 | 0.80 | 57,100 | | | | | |
| NWDX270D2S32 | 27.0 | 137 | 57 | 0.70 | 57,100 | | | | | |
| NWDX275D2S32 | 27.5 | 138 | 58 | 0.60 | 57,100 | | | | | |
| NWDX280D2S32 | 28.0 | 139 | 59 | 0.50 | 57,100 | | | | | |
| NWDX285D2S32 | 28.5 | 140 | 60 | 0.45 | 57,100 | | | | | |
| NWDX290D2S32 | 29.0 | 143 | 62 | 1.00 | 61,900 | | | | | |
| NWDX295D2S32 | 29.5 | 144 | 63 | 0.90 | 61,900 | | | | | |
| NWDX300D2S40 | 30.0 | 158 | 64 | 0.80 | 61,900 | | | | | |
| NWDX310D2S40 | 31.0 | 160 | 66 | 0.70 | 61,900 | | | | | |
| NWDX320D2S40 | 32.0 | 162 | 68 | 0.60 | 61,900 | | | | | |
| NWDX330D2S40 | 33.0 | 164 | 70 | 1.00 | 65,000 | | | | | |
| NWDX340D2S40 | 34.0 | 166 | 72 | 0.90 | 65,000 | | | | | |
| NWDX350D2S40 | 35.0 | 168 | 74 | 0.80 | 65,000 | | | | | |
| NWDX360D2S40 | 36.0 | 170 | 76 | 0.70 | 65,000 | | | | | |
| NWDX370D2S40 | 37.0 | 179 | 79 | 0.60 | 65,000 | | | | | |
| NWDX380D2S40 | 38.0 | 181 | 81 | 0.50 | 65,000 | | | | | |
| NWDX390D2S40 | 39.0 | 183 | 83 | 1.50 | 69,000 | | | | | |
| NWDX400D2S40 | 40.0 | 185 | 85 | 1.40 | 69,000 | | | | | |
| NWDX410D2S40 | 41.0 | 187 | 87 | 1.30 | 69,000 | | | | | |
| NWDX420D2S40 | 42.0 | 189 | 89 | 1.20 | 69,000 | | | | | |
| NWDX430D2S40 | 43.0 | 191 | 91 | 1.10 | 69,000 | | | | | |
| NWDX440D2S40 | 44.0 | 193 | 93 | 1.00 | 65,000 | | | | | |
| NWDX450D2S40 | 45.0 | 195 | 95 | 0.90 | 65,000 | | | | | |
| NWDX460D2S40 | 46.0 | 197 | 97 | 0.80 | 65,000 | | | | | |
| NWDX470D2S40 | 47.0 | 199 | 99 | 0.60 | 65,000 | | | | | |
| NWDX480D2S40 | 48.0 | 201 | 101 | 0.50 | 65,000 | | | | | |
| NWDX490D2S40 | 49.0 | 203 | 103 | 1.00 | 65,000 | | | | | |
| NWDX500D2S40 | 50.0 | 205 | 105 | 0.90 | 65,000 | | | | | |
| NWDX510D2S40 | 51.0 | 207 | 107 | 0.80 | 65,000 | | | | | |
| NWDX520D2S40 | 52.0 | 209 | 109 | 0.60 | 65,000 | | | | | |
| NWDX530D2S40 | 53.0 | 211 | 111 | 0.50 | 65,000 | | | | | |
| NWDX540D2S40 | 54.0 | 213 | 113 | 0.40 | 65,000 | | | | | |
| NWDX550D2S40 | 55.0 | 215 | 115 | 0.30 | 65,000 | | | | | |