



Dial Pipe Gauges

Special gauges for measuring wall thickness of pipes.

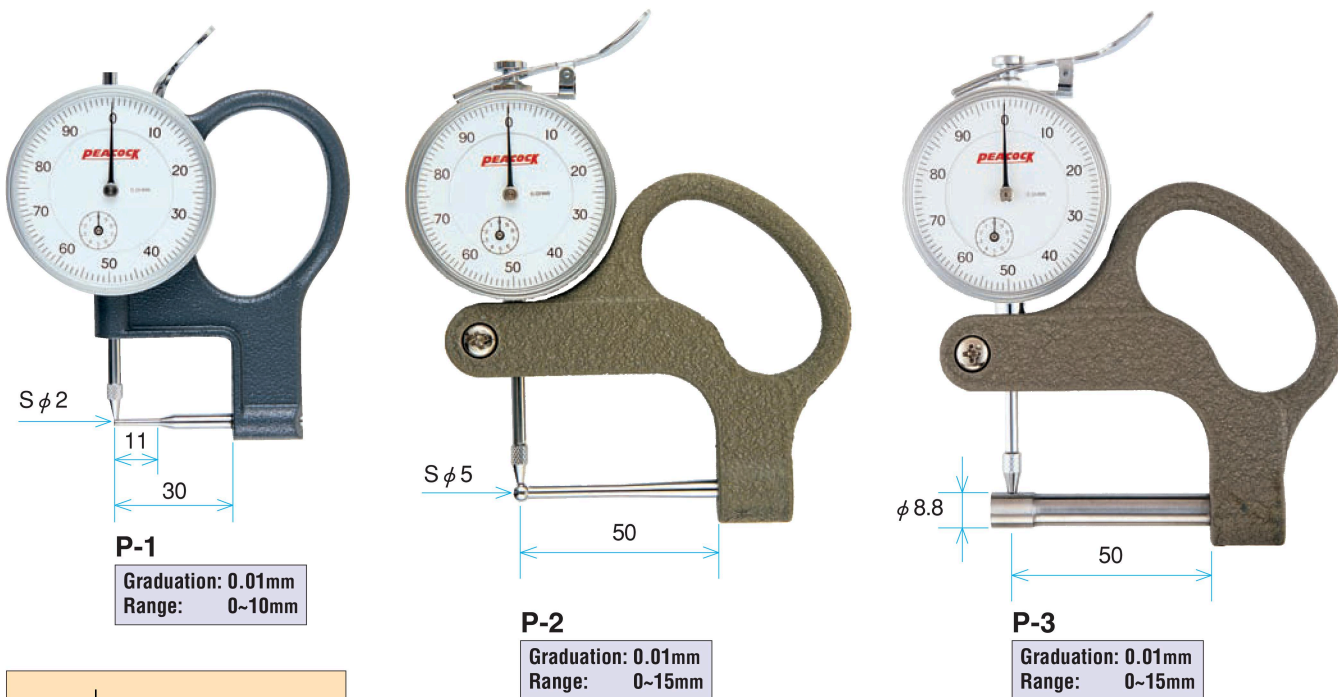


Specifications

Model	Graduation (mm)	Range (mm)	Accuracy (μm)	Pipe size measurable (mm)			Measuring force less than (N)
				Minimum bore D	Maximum wall thickness T	Depth L	
P-1	0.01	0~10	±20	2.5	10	10	1.8
P-2	0.01	0~15	±22	5.1	15	50	1.8
P-3	0.01	0~15	±22	9.0	15	50	1.8

Dial Lens Gauge

The dial lens gauge can measure convex, concave, convexo-concave and any other lenses in the same gauge by replacing the two contact points and the anvil.




Replaceable Flat contact point (Standard accessory)



GL
Graduation: 0.01mm
Range: 10mm

Applied examples

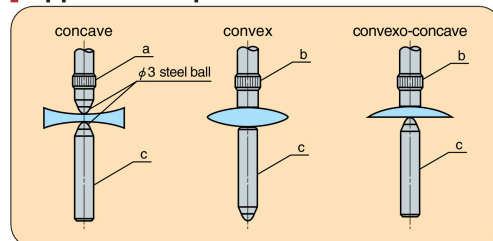

Specifications

Model	Graduation (mm)	Range (mm)	Accuracy (μm)	Throat depth (mm)	maximum lens diameter measurable (mm)	maximum lens thickness measurable (mm)	Measuring force less than (N)
GL	0.01	10	±20	30	φ 59	※ 20	1.8

※ Anvil side is adjustable.