


T-Max® U-Lock insert for thread turning

UN 60° Full form

THFTSR ISO 5864-1978
 TCTR 2B
 NT 1

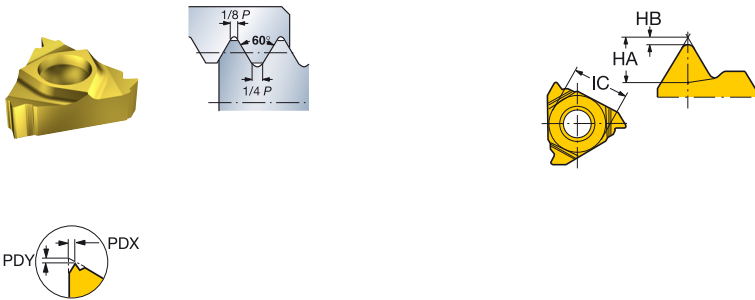

Internal right-hand threads

							Dimensions, mm, inch								
		P	M	K	N	S	H	HA	HA"	HB	HB"	PDX	PDX"	PDY	PDY"
	TPI NT	1020	1020	1020	1020	1020	1020	HA	HA"	HB	HB"	PDX	PDX"	PDY	PDY"
11 1/4	32.0 1	☆	☆	☆	☆	☆	☆	0.50	.0197	0.04	.0016	0.60	.023	0.68	.026
	28.0 1	☆	☆	☆	☆	☆	☆	0.58	.0228	0.05	.0020	0.80	.031	0.68	.026
	24.0 1	☆	☆	☆	☆	☆	☆	0.67	.0264	0.06	.0024	0.85	.033	0.68	.026
	20.0 1	☆	☆	☆	☆	☆	☆	0.80	.0315	0.07	.0028	0.90	.035	0.68	.026
	18.0 1	☆	☆	☆	☆	☆	☆	0.89	.0350	0.08	.0032	1.00	.039	0.68	.026
	16.0 1	☆	☆	☆	☆	☆	☆	1.00	.0394	0.09	.0035	1.00	.039	0.68	.026
	14.0 1	☆	☆	☆	☆	☆	☆	1.13	.0445	0.11	.0043	1.05	.041	0.68	.026

Internal left-hand threads

							Dimensions, mm, inch								
		P	M	K	N	S	H	HA	HA"	HB	HB"	PDX	PDX"	PDY	PDY"
	TPI NT	1020	1020	1020	1020	1020	1020	HA	HA"	HB	HB"	PDX	PDX"	PDY	PDY"
11 1/4	32.0 1	☆	☆	☆	☆	☆	☆	0.50	.0197	0.04	.0016	0.60	.023	0.68	.026
	28.0 1	☆	☆	☆	☆	☆	☆	0.58	.0228	0.05	.0020	0.80	.031	0.68	.026
	24.0 1	☆	☆	☆	☆	☆	☆	0.67	.0264	0.06	.0024	0.85	.033	0.68	.026
	20.0 1	☆	☆	☆	☆	☆	☆	0.80	.0315	0.07	.0028	0.90	.035	0.68	.026
	18.0 1	☆	☆	☆	☆	☆	☆	0.89	.0350	0.08	.0032	1.00	.039	0.68	.026
	16.0 1	☆	☆	☆	☆	☆	☆	1.00	.0394	0.09	.0035	1.00	.039	0.68	.026
	14.0 1	☆	☆	☆	☆	☆	☆	1.13	.0445	0.11	.0043	1.05	.041	0.68	.026

R = Right hand, L = Left hand

