


C-Type Retaining Rings For Holes (Nominals $\phi 10 \sim \phi 63$)

JIS B 2804 (Ref.)

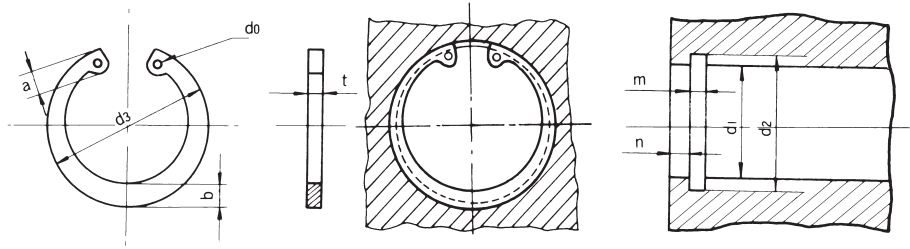

Unit : mm

Dimensions Code	Nominals d_1	Dimensions of Retaining Rings							Thrust Loading Allowance (Ref.) kN	Groove Dimensions (Ref.)				
		d_3		t		b	a	d_0		d_2		m		n
		Basic	Tolerance	Basic	Tolerance	Approx.	Approx.	Min.		Basic	Tolerance	Basic	Tolerance	Min.
17010	10	10.7	± 0.18	1	± 0.05	1.8	3.1	1.2	4.71	10.4	$+0.11$ 0	1.15	1.5	
17011	11	11.8					3.2		5.22					11.4
17012	12	13					3.3	5.69	12.5					
17013	13	14.1					3.5	6.16	13.6					
17014	14	15.1					3.6	6.67	14.6					
17015	15	16.2				2	1.7	3.6	7.18					15.7
17016	16	17.3						3.7	7.65					16.8
17017	17	18.3						3.8	8.08					17.8
17018	18	19.5						4.0	8.55					19
17019	19	20.5						4.0	9.10					20
17020	20	21.5	± 0.2	1.2	± 0.06	2.5	4.0	2	9.57	$+0.21$ 0	1.35	1.5		
17021	21	22.5					4.1		10.20				22	
17022	22	23.5					4.1	12.71	23					
17024	24	25.9					4.3	13.81	25.2					
17025	25	26.9					4.4	14.59	26.2					
17026	26	27.9				4.6	15.38	27.2						
17028	28	30.1				4.6	16.24	29.4						
17030	30	32.1				4.7	17.26	31.4						
17032	32	34.4				5.2	19.30	33.7						
17034	34	36.5				5.2	24.32	35.7						
17035	35	37.8	± 0.25	1.5	± 0.06	3.5	5.2	2.5	25.11	$+0.25$ 0	1.65	2		
17036	36	38.8					5.2		25.89				38	
17037	37	39.8					5.2	26.83	39					
17038	38	40.8					5.3	27.46	40					
17040	40	43.5					5.7	32.01	42.5					
17042	42	45.5				5.8	35.70	44.5						
17045	45	48.5				5.9	37.78	47.5						
17047	47	50.5				6.1	39.62	49.5						
17048	48	51.5				6.2	40.80	50.5						
17050	50	54.2				6.5	48.05	53						
17052	52	56.2	± 0.45	2	± 0.07	5.1	6.5	2.5	50.21	$+0.3$ 0	2.2	2		
17055	55	59.2					6.5		53.35				58	
17056	56	60.2					6.6	54.52	59					
17058	58	62.2					6.8	56.09	61					
17060	60	64.2					6.8	57.66	63					
17062	62	66.2				6.9	60.41	65						
17063	63	67.2				6.9	61.98	66						

Continue to next page.