


FOR SUS CHAIN SPROCKET MC 가공 분리형 (SPLIT TYPE)

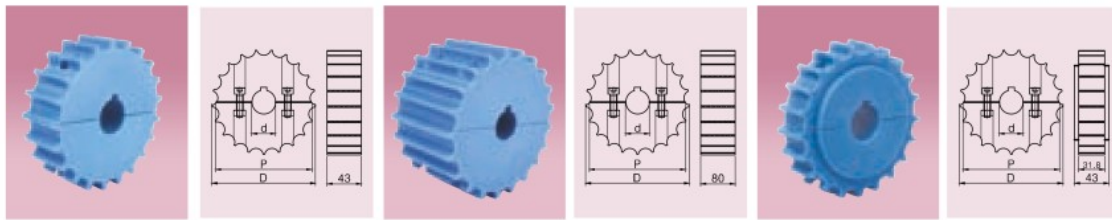

FOR SINGLE HINGE CHAIN

FOR DOUBLE HINGE CHAIN

FOR TAB/BEV CHAIN

| CHAIN TYPE | TEETH | BORE (d) | CODE.NO | PITCH DIAMETER (P)MM | OUTSIDE DIAMETER (D)MM | WEIGHT Kg/EA |
|---------------------------------|---------------------------------------|------------|---------|------------------------|--------------------------|--------------|
| | | MM | | | | |
| SUS CHAIN Single hinge chain | 19T | 25 | 1401 | 117.0 | 117 | 0.42 |
| | | 30 | 1402 | | | |
| | | 35 | 1403 | | | |
| | 21T | 25 | 1404 | 129.26 | 129.5 | 0.58 |
| 30 | | 1405 | | | | |
| 35 | | 1406 | | | | |
| 23T | 25 | 1407 | 141.22 | 142 | 0.65 | |
| | 30 | 1408 | | | | |
| | 35 | 1409 | | | | |
| 25T | 25 | 1411 | 153.21 | 154.2 | 0.77 | |
| | | 30 | | | | 1412 |
| | | 35 | | | | 1413 |
| | DOUBLE Hinge chain (P/L,SUS 공용) | 19T | 25 | 1414 | 117.0 | 117 |
| 30 | | | 1415 | | | |
| 35 | | | 1416 | | | |
| 21T | | 25 | 1417 | 129.26 | 129.5 | 1.03 |
| | 30 | 1418 | | | | |
| | 35 | 1419 | | | | |
| 23T | 25 | 1421 | 141.22 | 142 | 1.23 | |
| | 30 | 1422 | | | | |
| | 35 | 1423 | | | | |
| 25T | 25 | 1424 | 153.21 | 154.2 | 1.46 | |
| | | 30 | | | | 1425 |
| | | 35 | | | | 1426 |
| | TAB/BEV (TAB/BEV sus chain용) | 19T | 25 | 1427 | 117.0 | 117 |
| 30 | | | 1428 | | | |
| 35 | | | 1429 | | | |
| 21T | | 25 | 1431 | 129.26 | 129.5 | 0.45 |
| | 30 | 1432 | | | | |
| | 35 | 1433 | | | | |
| 23T | 25 | 1434 | 141.22 | 142 | 0.55 | |
| | 30 | 1435 | | | | |
| | 35 | 1436 | | | | |
| 25T | 25 | 1437 | 153.21 | 154.2 | 0.65 | |
| | | 30 | | | | 1438 |
| | | 35 | | | | 1439 |

Material : Mono cast Nylon
Color : Blue

MC Nylon Sprocket의 장점

- 마모와 부하에 잘 견디어 수명이 길다
- 메이커별 일정하지 않은 체인 pitch를 잘 흡수한다.

PROS OF MC NYLON SPROCKET

- It is resistant to wear and load.
- It absorbs chain pitch well although chain pitch is different by brands.