

# Shaft Collar Clamp


## 2-Hole / 2-Tapped (Coarse)



Type		M Material	S Surface Treatment	A Accessory
2-Hole	2-Tapped			Hex Socket Head Cap Screw 1 pc.
SCSM	SCSW	S45C	Black Oxide Coating	MSCM435 Equivalent
PSCSM	PSCSW	Equivalent	Electroless Nickel Plating	MSSUS304 Equivalent
SSCSM	SSCSW	SUS304 Equivalent	-	-

25 / (6.3 / )

\*D6 ~D25: C0.5  
D30~D50: C1

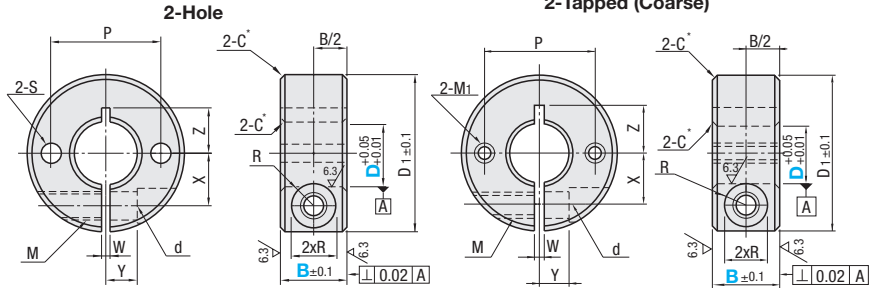

Part Number	B Selection	D1	M (Coarse)	d	R	W	X	Y	Z	P	2-Hole			2-Tapped					
											S	Unit Price		M1 (Coarse)	Unit Price				
Type	D										SCSM	PSCSM	SSCSM	SCSW	PSCSW	SSCSW			
(2-Hole) SCSM PSCSM SSCSM	6	20	* 8	M3	3.4	3	1	6	4	6~6.5	12	3.5							
			*10	M4	4.5	3.75					13							M3	
			* 8	M3	3.4	3					14								
	8	25	*10	M4	4.5	3.75		8			7~9	18	4.5						
			*12	M5	5.5	4.5						M4							
			*15	M6	6.6	6													M5
	10	30	* 8	M3	3.4	3		9			7~10	20	5.5						
			*10	M4	4.5	3.75						M5							
			*12	M5	5.5	4.5													
	12	35	*15	M6	6.6	6		10			8~10	24	6.6						
			* 8	M3	3.4	3						M5							
			*10	M4	4.5	3.75													
13	30	*12	M5	5.5	4.5	11			9~10	22	5.5								
		*12	M5	5.5	4.5					M5									
		*15	M6	6.6	6														
15	35	*10	M4	4.5	3.75	11			10~12	24	6.6								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
16	40	*10	M4	4.5	3.75	11.5			10~11	23	4.5								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
18-20	45	*10	M4	4.5	3.75	12			11~13	26	5.5								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
25	50	*10	M4	4.5	3.75	13			11~13	28	6.6								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
30	60	*10	M4	4.5	3.75	14			13	30	5.5								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
35	70	*10	M4	4.5	3.75	15			13~15	34	6.6								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
40	85	*10	M4	4.5	3.75	17			16	36	5.5								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
50	110	*10	M4	4.5	3.75	18			16~18	38	6.6								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
55	120	*10	M4	4.5	3.75	20			18~20	44	9								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
60	130	*10	M4	4.5	3.75	23			18~21	45	6.6								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
70	140	*10	M4	4.5	3.75	26			21	48	9								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5
85	150	*10	M4	4.5	3.75	32			28	68	11								
		*12	M5	5.5	4.5					M4									
		*15	M6	6.6	6														M5

Ordering Example: Part Number - B  
SCSM10 - 10

EX Example

Tips on Assembly  
When using collars as shown in the diagram on the right, clamping the shaft with the screw ① after the collar is fully tightened to the plate with the screws ② is not possible. The type shown on P.285 that can be fully mounted first with the screws ② is recommended.

