




Type	M Material	S Surface Treatment
LXHB	S45C	Black Oxide
PLXHB	Equivalent	Electroless Nickel Plating
SLXHB	SUS304	-

6.3 / (1.6 /)

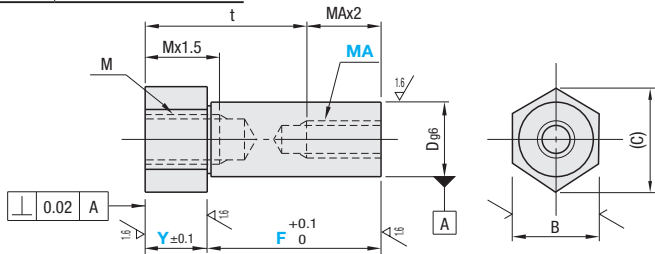

Part Number Type	No.	Dg6	1mm Increment		MA (Coarse) Selection	M (Coarse)	B	(C)	Unit Price			
			Y	F					LXHB	PLXHB	SLXHB	
LXHB	6	6	-0.004 -0.012	2-60	3	M 3	8	9.2				
	8	8	-0.005		4	M 4	10	11.5				
	10	10	-0.014		4 5 6	M 6	13	15				
	12	12			5 6 8	M 8	14	16.2				
	13	13					17	19.6				
	15	15	-0.006									
	16	16	-0.017									
	17	17				6 8 10	M10	19	21.9			
	18	18										
	20	20										
PLXHB	22	22		10-150	6 8 10 12	M12	24	27.7				
	25	25	-0.007 -0.020		8 10 12 16	M16	27	31.2				
	25A	25				M12						
	30	30			8 10 12 16 20	M20	32	36.9				
	30A	30				M16						

D	M	t
6	M 3	11
8	M 4	12.5
10	M 6	14
12,13	M 8	17
15		
16	M10	20
17		
18		
20	M12	25
22		
25	M16	31
30	M20	37

Specify dimensions Y and F not to make the dimension "t" less than the values in the table above.

Ordering Example

Part Number - Y - F - MA

FXHB20 - 17 - F25 - MA10

FXJB12 - 24 - F18 - MA6

Alterations

Part Number - Y - F - MA - (YKC, WSC, APC)

FXHB25 - 50 - F32 - MA10 - YKC- APC

EX Example

Alterations	Y Dimension Tolerance	Four Wrench Flats	Adds a Pilot
Code	YKC	WSC	APC
Spec.	Changes Y dimension tolerance to ±0.05. Applicable to all types. Ordering Code YKC	Changes from two wrench flats to four wrench flats. Applicable to Standard and Stepped Types. Ordering Code WSC	Adds a pilot to the shaft seat. Applicable to all types. Ordering Code APC

