


Photo Sensor Cams

Slit (Solid, Slit, Configurable Slit)

Combination use with Photo Sensor allows rotational speed detection.



Type			M Material	S Surface Treatment	A Accessory
Solid	Slit	Configurable Slit			
HPSCN	HPSC	HPSCZ	A6063	Black Anodize	Set Screw 2 pcs.
HPSCWN	HPSCW	HPSCWZ		Clear Anodize	

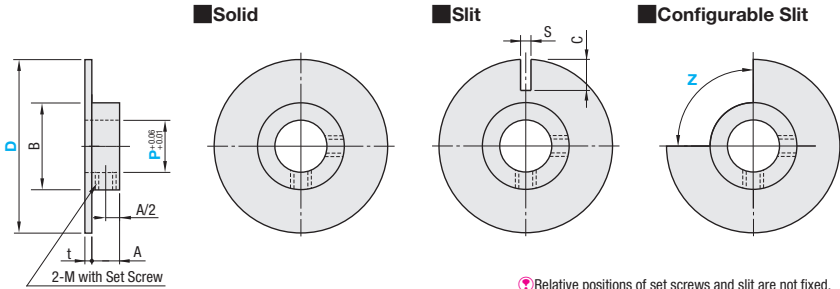

Part Number	Type	D	P Selection	Z Increment	M	A	B	C	S	t	HPSCN, HPSCWN		HPSC, HPSCW		HPSCZ, HPSCWZ	
											Unit Price	Volume Discount Rate	Unit Price	Volume Discount Rate	Unit Price	Volume Discount Rate
											1 ~ 9 pc(s).	10~50	1 ~ 9 pc(s).	10~50	1 ~ 9 pc(s).	10~50
(Solid) HPSCN HPSCWN	28	5 6 8	10~350 (Available for Configurable Slit Type only)	M3	5.5	14	6.5	1.5	1.5	2-M with Set Screw						
	32	3 4 5 6 6.35 8			M4	20		2								
	40	3 4 5 6 6.35 8 9.5 10 12			M3	25		8.5			2.5					
	45	5 6 8 10 12 15		M4	7.5	30										
	(Slit) HPSC HPSCW	45		5 6 8 10 12 15	M3	7.5	2.5									
	(Configurable Slit) HPSCZ HPSCWZ	50		4 5 6 6.35 8 9.5 10 12 15	M4	30										
60	6 6.35 8 9.5 10 12 15															

Ordering Example

Part Number - P - Z

HPSCZ50 - 9.5 - 180

Alterations

Part Number - P(PC) - (SC, PC, NC)

HPSC40 - PC11 - SC1.8

Alterations	Slit Width	Shaft Bore Dia.	Number of Slits (Equal Pitch)
		SC	PC
Code	SC	PC	NC
Spec.	SC=0.1mm Increment 1.0≤SC≤3.0 Applicable to HPSC and HPSCW only.	D PC Selection 32 7 40 7 9 11 50 7 9 11 13 14 Applicable to HPSCN, HPSCWN, HPSC and HPSCW only.	Specify the number of slits following NC symbol. Ex) When the number of slits is 3 >> NC3 2≤NC≤10 The number of slits 7 is not selectable. Applicable to HPSC and HPSCW only. Not applicable to D28.

EX Example

