



# Extruded Brackets - For 1 Slot

## For 5 Series (Slot Width 6mm) Aluminum Extrusions





**Features:** Perpendicularly Machined Type Extruded Brackets with tabs to fit extrusions. Brackets with tabs to fit in slots of extrusions and stop rotating when tightening.



<b>HBKST5</b> <b>HBKTS5</b> <b>HBKTSB5</b> (Black Anodize)	<b>Part Number</b>	<b>Perpendicularity K</b>
	HBKST5	0.03
	HBKTS5	0.03
	HBKTSB5*	0.06
	(Black Anodize)	


Type	Material	Surface Treatment
HBKST5	A6N01SS-T5	Anodize
HBKTS5		Anodize
HBKTSB5		Black Anodize



Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price (1-99 pc(s))	Volume Discount Rate (100-200)
		Screw	Quantity	T Nut	Quantity			
HBKST5	15	CBM5-10	2	HNTT5-5	2	833		
HBKTS5				HNTT5-5				
HBKTSB5*				HNTT5-5				

\* For repairing black anodizing, refer to P.846.



**Features:** Aluminum Extruded Brackets. Excels in appearance.

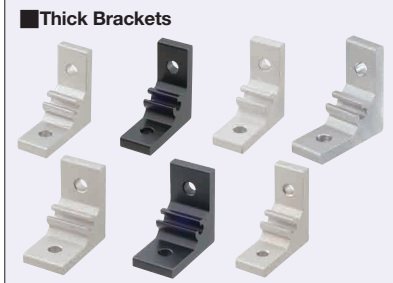

**NBLTS5**  
**HBLTS5**  
**HBLTS5-4** (For M4 Screw)  
**HBLTSB5** (Black Anodize)  
**CHBLTS5** (Clear Coating)

\* Ø4.5 for HBLTS5-4.

Type	Material	Surface Treatment
NBLTS5	A6063S-T5	Anodize
HBLTS5(-4)	A6063S-T5	Anodize
HBLTSB5	A6N01SS-T5	Black Anodize
CHBLTS5	A6063S-T5	Clear Paint (Anodize + Clear Paint)





Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price (1-99 pc(s))	Volume Discount Rate (100-200)
		Screw	Quantity	T Nut	Quantity			
NBLTS5	15	CBM5-10	2	HNTT5-5	2	833		
HBLTS5				HNTT5-5				
HBLTS5-4				HNTT5-4				
HBLTSB5*				HNTT5-5				
CHBLTS5				HNTT5-5				
HBLTV5	20	CBM5-10	2	HNTT5-5	2	833		
HBLTVB5*				HNTT5-5				

\* For repairing black anodizing, refer to P.846.

**Features:** Numbers of screws are the same as HBKTS5. Extrusions can be connected more securely. Perpendicularly Machined.



**HBKUS5**  
**HBKUSB5**  
(Black Anodize)  
Perpendicularity K: 0.06



Type	Material	Surface Treatment
HBKUS5	A6N01SS-T5	Anodize
HBKUSB5	A6N01SS-T5	Black Anodize



Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price (1-99 pc(s))	Volume Discount Rate (100-200)
		Screw	Quantity	T Nut	Quantity			
HBKUS5	31	CBM5-14	2	HNTT5-5	2	833		
HBKUSB5*				HNTT5-5				

\* For repairing black anodizing, refer to P.846.

**Features:** Numbers of screws are the same as HBLTS5. Extrusions can be connected more securely.



**NBLUS5**  
**HBLUS5**



Type	Material	Surface Treatment
NBLUS5	A6063S-T5	Anodize
HBLUS5	A6N01SS-T5	Anodize

Part Number	Mass (g)	Applicable Screw, T Nut				Allowable Load (N)	Unit Price (1-99 pc(s))	Volume Discount Rate (100-200)
		Screw	Quantity	T Nut	Quantity			
NBLUS5	31	CBM5-14	2	HNTT5-5	2	833		
HBLUS5								