# Tabbed Brackets - For 1 Slot
For 6 Series (Slot Width 8mm) Aluminum Extrusions

■**Features:** Tabbed Reversal Brackets with Cover. Designed to prevent dust build-up.

■**Brackets with Cover**

HBLFSNT6

Cover

Brackets

Ⓜ Material Cover: Polyamide (Black)
Bracket: ADC12

Part Number	Mass	Applicable Screw, T Nut				Accessory Component				Allowable Load (N)	Unit Price	Volume Discount Rate
Type	(g)	Screw	Quantity	T Nut	Quantity	Part①	Quantity	Part②	Quantity		1~99 pc(s).	100~200
HBLFSNT6	17	CBM6-12	2	HNTT6-6	2	Bracket	1	Cover	1	1176		

ex! Example
·Example of Mounting Covers to Brackets

HFS6-3030   Cover   Bracket Main Body

■**Features:** Tabbed Reversal Brackets with two mounting holes on one side can connect extrusions more securely.
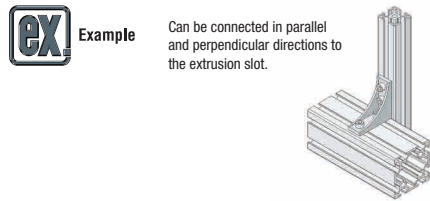
■**Tabbed Reversal Brackets**

HBLFSSW6
HBLFSSWB6 (Black Anodize)

For 50 Sq.

HBLFSSW6-50

Type	Ⓜ Material	Ⓢ Surface Treatment
HBLFSSW6		-
HBLFSSWB6	ADC12	Black Anodize
HBLFSSW6-50		-

Part Number	Mass	Applicable Screw, T Nut				Allowable Load (N)	Unit Price	Volume Discount Rate
Type	(g)	Screw	Quantity	T Nut	Quantity		1~99 pc(s).	100~200
HBLFSSW6	37	CBM6-12	4	HNTT6-6	4	1764		
HBLFSSWB6* (Black Anodize)								
HBLFSSW6-50	27							

* For repairing black anodizing, refer to **P.846**.

ex! Example
Can be connected in parallel and perpendicular directions to the extrusion slot.

Ordering Example | **Part Number**
HBLFSNT6
HBLFSSW6

Alterations | **Part Number** - (C, SET, SST, SEU, SSU, SEP, SSP, SEC)
HBLFSSW6 - SET

Alterations	Code	Spec.	Applicable Bracket
Mounting Hole Alteration for Cover	C	Adds taps on a bracket for cover mounting. (M5 on Both Sides) (Mounting Screw HCBM on **P.754**) Tapped Hole Position	HBLFSNT6
			HBLFSSW6
			HBLFSSWB6
			HBLFSSW6-50

■**C Hole Alterations**
(Example of Cover Mounting)
·Specify alteration code C.

M5

HCBM5-10
(**P.754**)

Alterations	Code	Spec.			Applicable Bracket
Applicable Screws and Nuts Set	SET SST (Stainless Steel) SEU (Pre-Assembly Insertion Spring Nuts) SSU (Pre-Assembly Insertion Spring Nuts Stainless Steel) SEP (Post-Assembly Insertion Spring Nuts) SSP (Post-Assembly Insertion Spring Nuts Stainless Steel) SEC (Screws with Captured Washer and Nuts)	Applicable screws and nuts for fixing the brackets on extrusions come in a set. (Adds to the bracket price.) (Ex.) When HBLFSSW6 is specified:			HBLFSNT6
		Code	Screw	Nut	
		SET	CBM6-12	HNTT6-6	HBLFSSW6
		SST	SCB6-12	HNTTSN6-6	
		SEU	CBM6-12	HNTU6-6	
		SSU	SCB6-12	SHNTU6-6	
		SEP	CBM6-12	HNTP6-6	HBLFSSWB6
		SSP	SCB6-12	SHNTP6-6	
		SEC	HCBST6-15	HNTT6-6	
		💡When specifying other than HBLFSSW6, check for the applicable screws and nuts.			HBLFSSW6-50

💡Screws for black anodized brackets are HCBMTB (Trivalent Chromate Black) on **P.751**.
💡Included Screw is not RoHS compliant when -SET, -SEU or -SEP other than black anodized brackets is specified.