

Thin Brackets


For 5 Series (Slot Width 6mm) Aluminum Extrusions



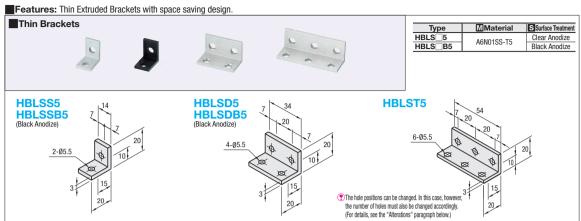

Example

HNTT5-5 (P.585)






Ordermy Example Ordering Part Number

> Part Number - (P, SET, SST, SEU, SSU, SEP, SSP) HBLST5 HBLST5 HBLST5 P - SET

Alterations	Code	Spec.				Applicable Bracket	JPY/1Code					
	SET SST (Stainless Steel) SEU (Pre-Assembly Iteerion Spring lats Suprinss Steel) Iteerion Spring lats Suprinss Steel Iteerion Spring lats SEP Post-Assembly Iteerion Spring lats Sainless Seel)	Applicable screws and nuts for fixing the brackets on				SET	SST	SEU	SSU	SEP	SSP	
Applicable Screws and Nuts Set		extrusions come in a set. (Adds to the bracket price.) (Ex.) When HBLSS5 is specified:				HBLSS5						
		(Ex.) When HBLSS: Screw Code PartNumber Quantity		Nu	It HBLSSB			-		-		-
		SET CBM5-8 SST SCB5-8	CBM5-8 SCB5-8 CBM5-8 SCB5-8	HNTT5-5 HNTTBS5-5	2	HBLSD5						
				HNTU5-5 SHNTU5-5 HNTP5-5		HBLSDB5		-		-		-
		SSP SCB5-8 When sp		SHNTP5-5		HBLST5						
		HBLSS5, check for the applicable screws and nuts.			HBLSP5							


Screws for black anodized brackets are made of HCBMTB (Trivalent Chromate Black) on P.780. Included Screw is not RoHS compliant when -SET, -SEU or -SEP is specified for any bracket other than black anodized ones.



Alterations	Code	Spec.	Applicable Bracket
Thin Bracket Hole Position	P	Thin Bracket Changes the screw-mounting hole positions for HBLST5.	HBLST5

Ordering Part Number

Features: Thin Brackets with tabs to fit in slots of extrusions. Since the tabs serve as the rotation stoppers for brackets when tightening, work efficiency is improved.

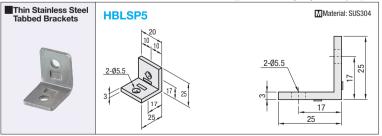

Applicable Screw, T Nut Allowable Unit Price Volume Discount Type Load (N) 1~99 pc(s). 100~200 Screw Qty. T Nut Qty. HBLSP5 10 CBM5-8 2 HNTT5-5 2 686

Alterations

HBLSP Features of HBLSP (Thin Stainle Steel Tabbed Bracket)

 $\ensuremath{\ensuremath{\%}}$ Supplies a set of applicable screws and nuts for fixing the bracket to an extrusion. See the above Alterations Table.

