


NV800-SEW NV800-HEW




NV800-SEW

Model		NV800-SEW	NV800-HEW
Number of poles		3	
Rated operational voltage Ue (V AC)		100-440 Multi-voltage type	
High-speed type	Rated current sensitivity $I\Delta n$ (mA)	-	
	Max. operating time at $5I\Delta n$ (s)	-	
Time-delay type	Rated current sensitivity $I\Delta n$ (mA)	100 · 200 · 500 Selectable	
	Max. operating time at $5I\Delta n$ (s)	0.45 · 1.0 · 2.0 Selectable	
	Max. inertial non-operating time at $2I\Delta n$ (s)	0.1 · 0.5 · 1.0	
Earth-leakage indication system		Button	
Rated short-circuit breaking capacity (kA) IEC 60947-2 (Icu/lcs) EN 60947-2	AC	440V	42/42
		400V	50/50
		230V	85/85
Standard attached parts (Front connection)		Mounting screw: M6x35 (4pcs) Insulation barrier: (2pcs)	


Operating Characteristics

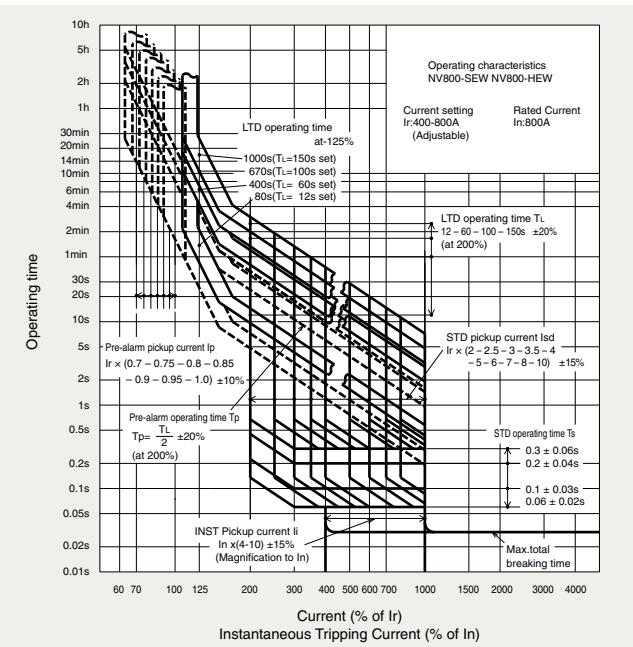

Earth Leakage Tripping Characteristics

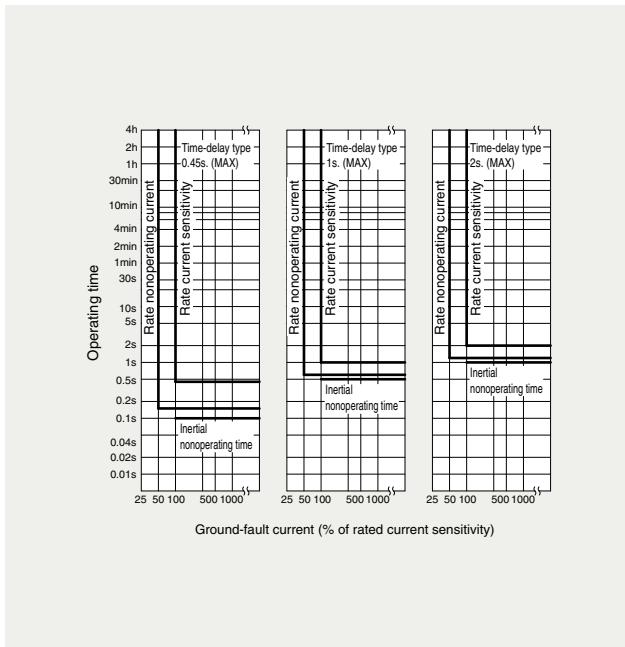


Internal Accessories

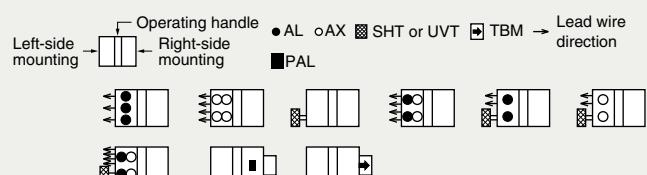

Remarks: 1. Instead of TBM, pre-alarm module (PAL) or trip indicator (TI) can be attached.

Current Reducing Curve

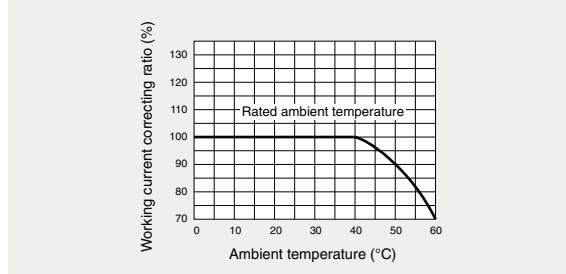

External Accessories

Accessories	Type name	Accessories	Type name
Operating handle	F F-8S	Auxiliary handle	HT HT-4SW
	V V-8S	Terminal cover	Large TC-L TCL-8SW3
Mechanical interlock	MI MI-8SW3		Skeleton TTC TTC-8SW3
			Rear BTC BTC-8SW3
		Handle lock device	HL HL-4SW
			HL-S HLS-8SW
		Electrical operation device	(*1)

Note *1 Specify the operation method and voltage.
Order in combination with the breaker unit.

Internal Wiring Diagram

