


# CWPT Oiles 2000 Wear Plates 20mm Thickness (2 hole type)




Specify Part No. by required width and length.  
(e.g.) Width is 125mm and length is 150mm.


**CWPT - 125150**  
Part No.

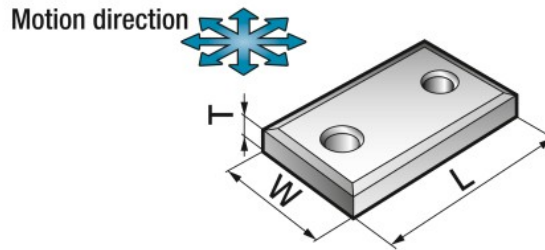

● CTP series were renamed CWPT series.




### Cross-section

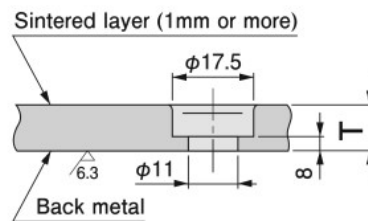

### Chamfering

#### Type A

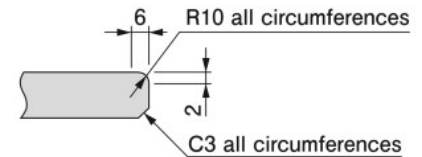

Part No.	Width		Length		Thickness		Mounting hole intervals			Attach bolts		Chamfering
	W	Tolerance	L	Tolerance	T	Tolerance	l <sub>1</sub>	Tolerance	l <sub>2</sub>	Type	Qty	
<b>CWPT-100100</b>	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	50	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-100125</b>	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	75	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-100150</b>	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	100	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-100200</b>	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	200	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	150	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-100250</b>	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	250	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	200	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-100300</b>	100	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	300	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	200	$\pm 0.2$	50	M10 Hexagon socket head	2	A
<b>CWPT-125125</b>	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	75	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-125150</b>	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	100	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-125200</b>	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	200	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	150	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-125250</b>	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	250	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	200	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-125300</b>	125	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	300	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	200	$\pm 0.2$	50	M10 Hexagon socket head	2	A
<b>CWPT-150150</b>	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	100	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-150200</b>	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	200	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	150	$\pm 0.2$	25	M10 Hexagon socket head	2	A
<b>CWPT-150250</b>	150	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	250	$\begin{matrix} -0.1 \\ -0.3 \end{matrix}$	20	$\pm 0.01$	200	$\pm 0.2$	25	M10 Hexagon socket head	2	A