


PCF

Female Straight

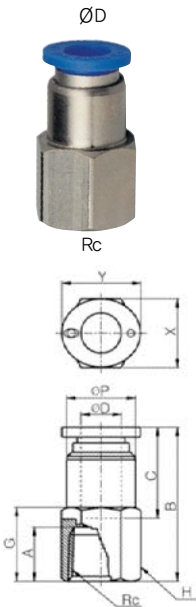

MODEL [ØD-T] Tube(Inch)-Thread(R)

(mm)


MODEL	ØD	Rc	ØP	G	A	B	C	H	X	Y	Orifice (Ømm)	W.G(g)	Qty/Inbox
PCF 5/32-R01	5/32	Rc1/8	10	11	9	26.2	16	14	10	12	3.5	15.1	100
PCF 5/32-R02	5/32	Rc1/4	10	14	12	29.2	16	17	10	12	3.5	22.2	100
PCF 5/32-R03	5/32	Rc3/8	10	15	13	30.2	16	21	10	12	3.5	35.3	50
PCF 3/16-R01	3/16	Rc1/8	10.3	11	9	27.1	17	12	11	13	4	23.5	50
PCF 3/16-R02	3/16	Rc1/4	10.3	14	12	30.1	17	14	11	13	4	26.9	50
PCF 1/4-R01	1/4	Rc1/8	12	10	9	27.2	17	14	12	14	5	24.1	100
PCF 1/4-R02	1/4	Rc1/4	12	14	12	30.2	17	17	12	14	5	27.2	50
PCF 1/4-R03	1/4	Rc3/8	12	15	13	31.2	17	21	12	14	5	32.9	50
PCF 5/16-R01	5/16	Rc1/8	14	12	9	28.5	18.5	14	14	16	7	24.8	50
PCF 5/16-R02	5/16	Rc1/4	14	15	12	31.3	18.5	17	14	16	7	28.2	50
PCF 5/16-R03	5/16	Rc3/8	14	16	13	32.5	18.5	21	14	16	7	36.6	50
PCF 5/16-R04	5/16	Rc1/2	14	19	16	35.5	18.5	24	14	16	7	45.8	25
PCF 3/8-R01	3/8	Rc1/8	17	12	9	29.5	21	14	17	19	7	29.2	50
PCF 3/8-R02	3/8	Rc1/4	17	13	12	34	21	17	17	19	9	29	50
PCF 3/8-R03	3/8	Rc3/8	17	15	13	35	21	21	17	19	9	38.9	25
PCF 3/8-R04	3/8	Rc1/2	17	19	16	35.5	21	24	17	19	9	50.6	25
PCF 1/2-R02	1/2	Rc1/4	20	13	12	35.5	22.5	21	21	23	10	52.7	25
PCF 1/2-R03	1/2	Rc3/8	20	15	13	36.5	22.5	21	21	23	10	56.9	25
PCF 1/2-R04	1/2	Rc1/2	20	19	16	39.5	22.5	24	21	23	10	57.4	25

MODEL [ØD-T] Tube(Inch)-Thread(R)

(mm)

PH

Male Banjo

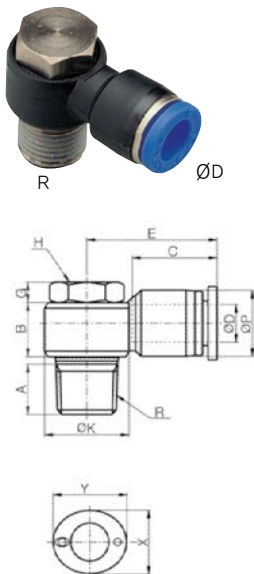

MODEL	ØD	R	ØP	A	B	C	E	H	ØK	G	X	Y	Orifice (Ømm)	W.G(g)	Qty/Inbox
PH N5/32-M5	N5/32	M5	10.4	5.5	9	16	20.7	8	10	3	10	12	2	7	100
PH N5/32-R01	N5/32	R1/8	10.4	8	12	16	22.4	10	14.4	4	10	12	3	14.7	50
PH N1/4-M5	N1/4	M5	12.4	5.5	9	17	23.2	8	10	3	12	14	2	7.7	100
PH N1/4-R01	N1/4	R1/8	12.4	8	12	17	23.6	10	14.4	4	12	14	4	15.5	50
PH N1/4-R02	N1/4	R1/4	12.4	11	11.8	17	25.7	14	18.4	4.5	12	14	4	28.4	50
PH N5/16-R01	N5/16	R1/8	14.4	8	12	18.5	25	10	14.4	4	14	16	5	16.4	50
PH N5/16-R02	N5/16	R1/4	14.4	11	11.8	18.5	28.2	14	18.4	4.5	14	16	5.5	29.8	50
PH N5/16-R03	N5/16	R3/8	14.4	12	15.5	18.5	28.6	19	22	5	14	16	6	51.8	25
PH N3/8-R02	N3/8	R1/4	17.6	11	11.8	21	31.2	14	18.4	4.5	17	19	5.5	32.5	25
PH N3/8-R03	N3/8	R3/8	17.6	12	15.5	21	31.6	19	22	5	17	19	8	54.7	25
PH N3/8-R04	N3/8	R3/8	17.6	15	17.7	21	34.5	24	28	5	17	19	8	91.2	20
PH N1/2-R03	N1/2	R3/8	21	12	15.5	22.5	36	19	22	5	21	23	9	57.7	25
PH N1/2-R04	N1/2	R1/2	21	15	17.7	22.5	36	24	28	5	21	23	9	92.9	20