



POB-0.3, 0.6A, 1.2A, 2.5A, 5A, 10, 20, 40

Model	Static friction torque(Nm)	Rated voltage(DC-V)	Power consumption at75°C(W)	Mass(kg)
POB-0.3	3	24	13.3	2.5
POB-0.6A	6	24	19.2	3.3
POB-1.2A	12	24	20.4	4.9
POB-2.5A	25	24	26.8	9
POB-5A	50	24	47.3	15.5
POB-10	100	24	52.8	33
POB-20	200	24	66	48
POB-40	400	24	92	80

POB-0.3 POB-10~40

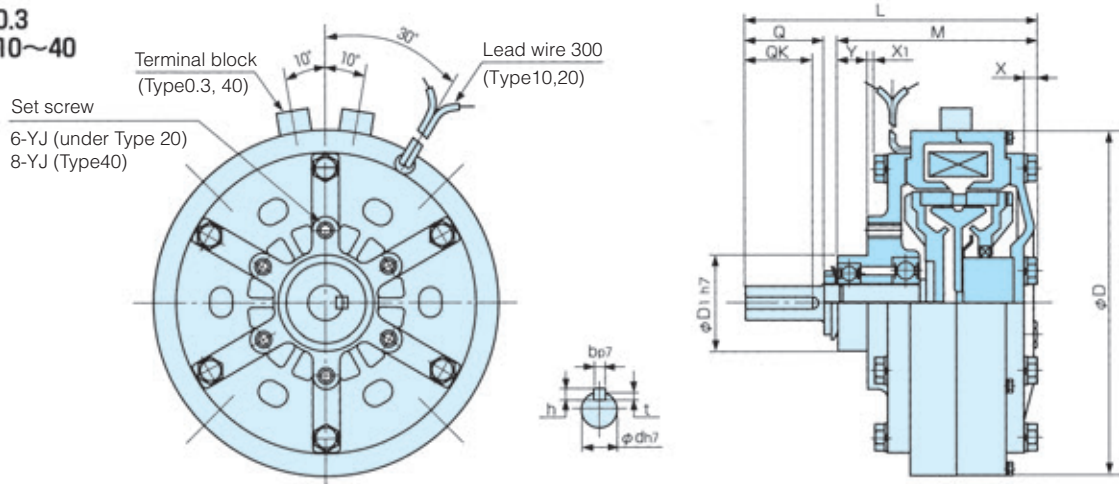

POB-0.6A~5A

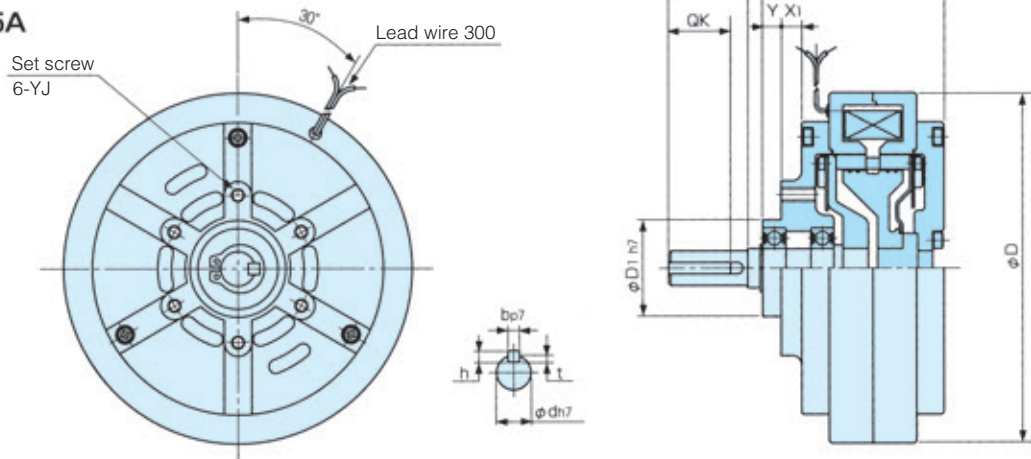

Model	Diameter direction		Shaft direction					Attachment		Shaft end					
	D	D1	L	M	X	X1	Y	P.C.D	Tap	Q	QK	d	b	h	t
POB-0.3	120	42	105	75	8.6	11	11	64	M5×10	23	20	10	4	4	2.5
POB-0.6A	134	42	103.5	71	—	7	8	64	M5×11	26	22	12	4	4	2.5
POB-1.2A	152	42	120	79	—	9	8	64	M6×13	34.5	27	15	5	5	3
POB-2.5A	182	55	145.5	94	—	9	9	78	M6×13	43	35	20	5	5	3
POB-5A	219	74	181	114.5	—	8	18	100	M6×13	57	47	25	7	7	4
POB-10	290	100	233.5	155.5	7.5	7.5	25	140	M10×18	67	56	30	7	7	4
POB-20	335	110	263.5	180.5	9.5	10.5	25	150	M10×18	71	60	35	10	8	4.5
POB-40	395	130	330	224	16.1	22.5	33	200	M12×20	92	80	45	12	8	4.5