


Dual-Fit Dowel Pins

p6-h7 p6-g6 / Hollow, Tapped


ℓ1 dimension may become larger than the value shown in the catalog due to polishing process.



p6-h7 Type MSY MSYC (Stainless Steel)



p6-g6 Type MSYG MSYGC (Stainless Steel)

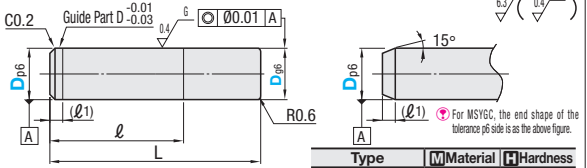

Type	Material	Hardness
MSY MSYG	SUSJ2	
MSYC MSYGC	SUS440C	58HRC~

Part Number	D	D Tolerance		No.	L	ℓ	ℓ1	MSY		MSYC	
		p6	h7					Unit Price	Volume Discount Rate	Unit Price	Volume Discount Rate
Type	D	p6	h7					1-99 pcs	100-1000 pcs	1-99 pcs	100-1000 pcs
MSY MSYC (Stainless Steel)	3	+0.012 +0.006	0 -0.010	803	8	3	1				
				8	4						
				805	5						
				1003	10	3					
				1005	5						
				10	7						
				12	6						
				15	10						
				20	20	13					
				803	8	3					
				8	4						
				805	5						
1005	10	7									
10	8										
1008	10	8									
1205	12	5									
12	6										
1208	12	8									
1508	15	10									
15	12										
1512	15	12									
20	20	13									
1003	10	3									
1005	10	5									
10	7										
1205	12	5									
12	6										
1208	12	8									
1508	15	10									
15	12										
1512	15	12									
18	18	12									
18	12										
20	20	13									
1005	10	5									
10	7										
1008	10	8									
1205	12	5									
12	6										
1208	12	8									
1508	15	10									
15	12										
1512	15	12									
18	18	12									
18	12										
20	20	13									
18	18	12									
18	12										
20	20	13									
25	25	16									
30	30	19									
18	18	12									
25	25	16									
30	30	19									
40	40	25									


Part Number	D	D Tolerance		No.	L	ℓ	ℓ1	MSYG		MSYGC	
		p6	g6					Unit Price	Volume Discount Rate	Unit Price	Volume Discount Rate
Type	D	p6	g6					1-99 pcs	100-1000 pcs	1-99 pcs	100-1000 pcs
MSYG MSYGC (Stainless Steel)	3	+0.012 +0.006	-0.002 -0.008	803	8	3	1				
				8	4						
				805	5						
				1003	10	3					
				1005	5						
				10	7						
				12	6						
				15	10						
				20	20	13					
				803	8	3					
				8	4						
				805	5						
1005	10	7									
10	8										
1008	10	8									
1205	12	5									
12	6										
1208	12	8									
1508	15	10									
15	12										
1512	15	12									
20	20	13									
1003	10	3									
1005	10	5									
10	7										
1205	12	5									
12	6										
1208	12	8									
1508	15	10									
15	12										
1512	15	12									
18	18	12									
18	12										
20	20	13									
1005	10	5									
10	7										
1008	10	8									
1205	12	5									
12	6										
1208	12	8									
1508	15	10									
15	12										
1512	15	12									
18	18	12									
18	12										
20	20	13									
18	18	12									
18	12										
20	20	13									
25	25	16									
30	30	19									
18	18	12									
25	25	16									
30	30	19									
40	40	25									

For orders larger than indicated quantity, please check with WOS.

For orders larger than indicated quantity, please check with WOS.



MSYT MSYTC (Stainless Steel)




The end shape of the tolerance p6 side for MSYTC is same as that of MSYG. Material: SUJ2 SUS440C. Hardness: 58HRC ~ 58HRC~.

ℓ1, ℓ2 dimension may become larger than the value shown in the catalog due to polishing process.



Ordering Example	Part Number	No.
	MSY3	10
	MSYG6	1208
	MSYT8	18

Part Number	D	D Tolerance		No.	MxP	L	ℓ	ℓ1	ℓ2	MSYT		MSYTC		
		p6	h7							Unit Price	Volume Discount Rate	Unit Price	Volume Discount Rate	
Type	D	p6	h7							1-99 pcs	100-1000 pcs	1-99 pcs	100-1000 pcs	
MSYT MSYTC (Stainless Steel)	6	+0.020 +0.012	0 -0.012	1205	4x0.7	12	5	1.5	5					
				12			6							
				1208			8							
				1508			8							
				15			15							
				1512			10							
				18			18							
				20			20				13			
				18			18				12			
				20			20				13			
				18			18				12			
				20			20				13			
25	25	16												
30	30	19												
18	18	12												
25	25	16												
30	30	19												
40	40	25												

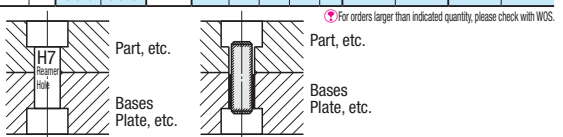

For orders larger than indicated quantity, please check with WOS.